


SPECIFICATIONS:



(top view) (bottom view)

Industry Standard Dimensions

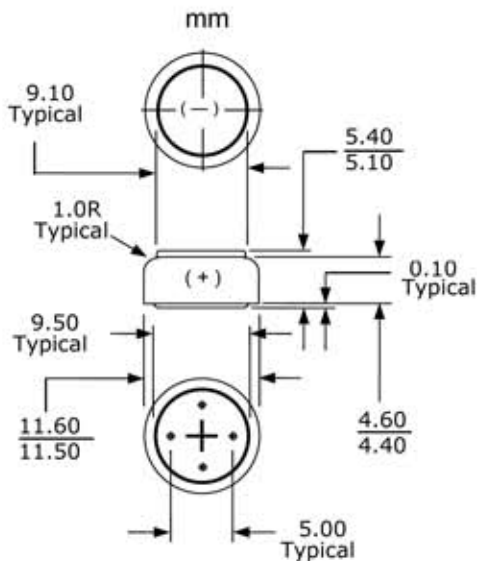


IEC 60086-2:2000 Standards

DISCHARGE CHARACTERISTICS AT 620Ω 25°C 60%RH
(Discharged 24 hours/day)



Construction

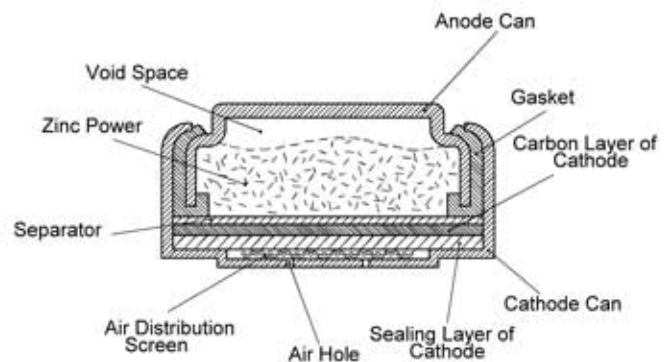


- Chemical System:** Zinc Air (Zn/O₂)
- Identification:** IEC-PR44
- Tab Color:** Blue
- Build Standard:** IEC 60086-2:2000, IEC 60086-2:2011
- Nominal Voltage:** 1.4 Volts
- Capacity (IEC 60086-2:2000):** 630 mAh (to 0.90 volts) (Rated at 620 ohms at 20°C/ 60%RH)
- Capacity (IEC 60086-2:2011):** 600 mAh (to 1.05 volts) (Rated at 5 mA continuous & 15 mA / 100 ms Pulses at 25°C/ 60%RH)
- Capacity Retention:** > 85%(after 3 years)
- Available Current:** 20 mA(at 1.1 volts)
- Tab Sealing Arrangements:** On Cathode Can. See picture above.
- Shelf Life:** 3 years
- Operation Temp:** 0°C to 50°C
- Typical Weight:** 1.62 grams (0.06 oz.)
- Typical Volume:** 0.56 cubic centimeters (0.034 cubic inch)
- Impedance:** ≤ 3 ohms (at AC 1000Hz)

**Importör: www.midas.nu
Södergatan 16, 275 75 Lövestad
0417 21091**


This data sheet is subject to change without prior notice. Contact us for the latest information. Contents here do not constitute a warranty. May 2011

Discharge Charts of IEC 60086-2:2011 Standards

Hearing aid standard

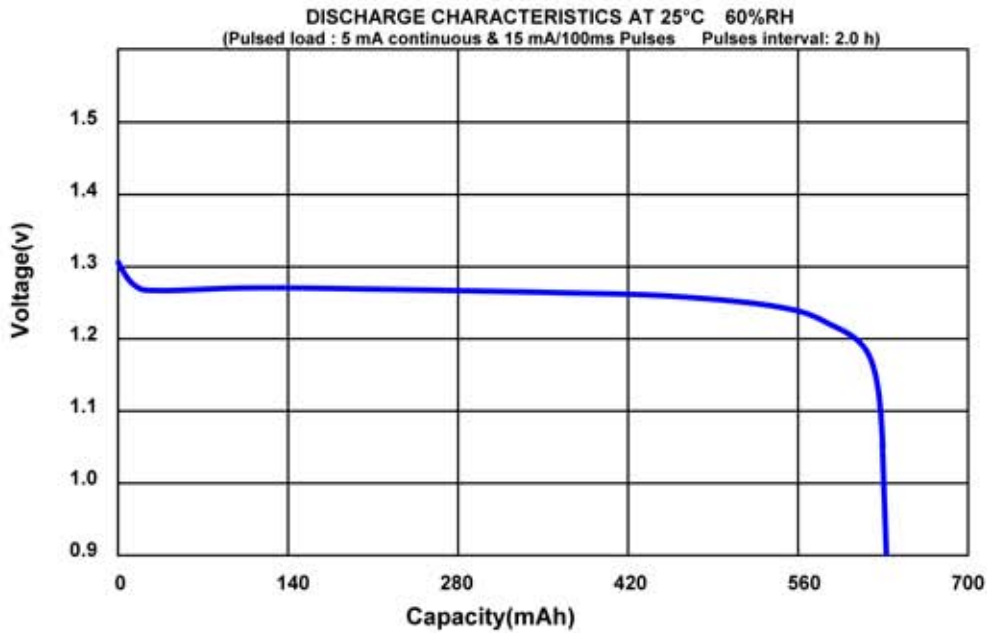

Hearing aid high drain

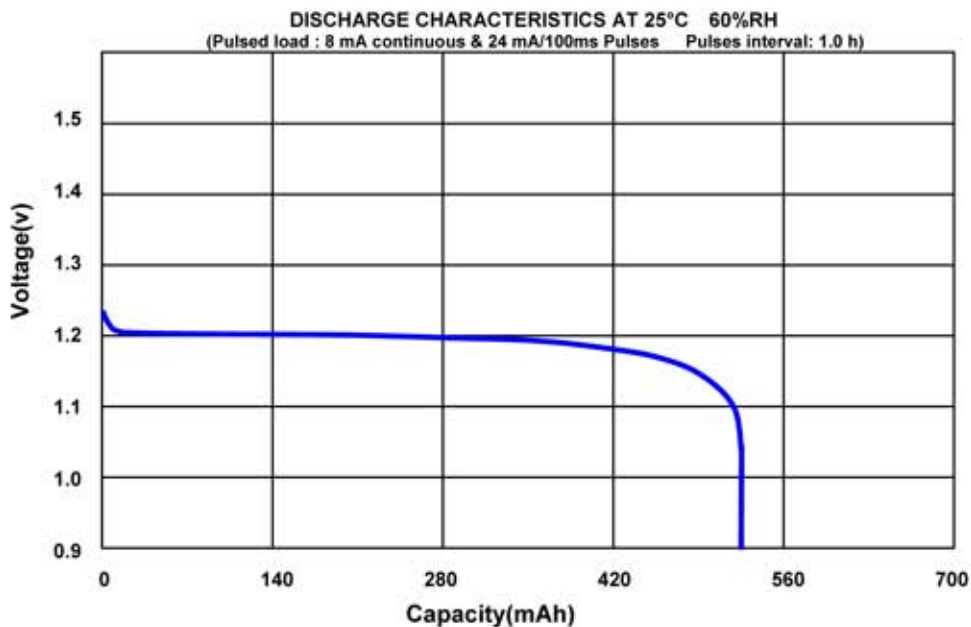

Importör: www.midas.nu
 Södergatan 16, 275 75 Lövestad
 0417 21091

This data sheet is subject to change without prior notice.
 Contact us for the latest information. Contents here do not
 constitute a warranty. May 2011